


**MODEL**

**DESCRIPTION**

**EVERHOT  
Tank Only**

Part # WI-LVH-TANK

Shipping Wt: 7 lbs.

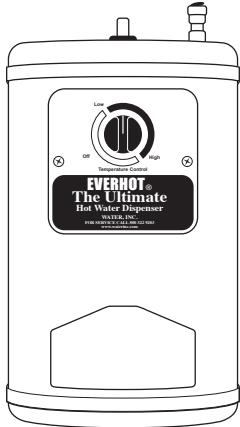

**White Shell**

**Maximum Dimensions:** Width: 7-3/4"  
Height: 13"  
Depth: 9"

Undercounter instant hot water heating tank with adjustable temperature control delivers up to 190° hot water from a compact, 3 quart high temperature engineered reservoir.

Includes a 3' cord with a 3-prong plug.

Heating element: 780 Watts, 6.5 Amps, 120 Volts, 60 Hz

Warranty: 1 year

Capacity: 5/8 gallons (60 cups per hour or 67 oz. at once.)



Meets National Lead Laws including NSF 372 - 2011 Drinking Water System Components - Lead Content and S.3874, Reduction of Lead in Drinking Water Act, CAAB 1953 and VT Act 193.

**STAINLESS STEEL  
EVERHOT  
Tank Only**

Part # WI-LVH-TANK-SS

Shipping Wt: 7 lbs.



**Stainless Steel  
Shell**

**Dimensions:** Width: 7 3/4"  
Height: 13"  
Depth: 9"

Undercounter instant hot water heating tank with adjustable temperature control delivers up to 190° hot water from a compact, stainless steel, 3 quart reservoir. Heater Protection with self-resetting thermal fuse.

Includes a 3' cord with a 3-prong plug.

Heating element: 1300 Watts, 10.8 Amps, 120 Volts, 60 Hz

Warranty: 3 years

Capacity: 5/8 gallons (**100 cups per hour** or 67 oz. at once.)



Meets National Lead Laws including NSF 372 - 2011 Drinking Water System Components - Lead Content and S.3874, Reduction of Lead in Drinking Water Act, CAAB 1953 and VT Act 193.

The Everhot mark is used under license from Bradford White Corp.



**MAXIMUM recommended line pressure for this product is 75 PSI.** Pressure above 75 PSI indicates the absence of a properly functioning water pressure regulator at the property. Excessive water pressure poses a risk of property damage to you. Problems due to excessive water pressure are NOT covered by this product's warranty. **BEFORE** installation of any Water, Inc. product, confirm that water supply pressure does not exceed 75 PSI. Questions? Contact Water, Inc. Service Dept. at 800.322.WATER(9283)

Installations must comply with appropriate plumbing codes. Do not use vinyl tubing to connect any Water, Inc. Product to a water source. Polyethylene tubing is recommended for cold water applications.

# EVERHOT®


## MODEL

## DESCRIPTION

### EVERHOT For Export

Part # WI-LVH-TANK-220

Shipping Wt: 7 lbs.

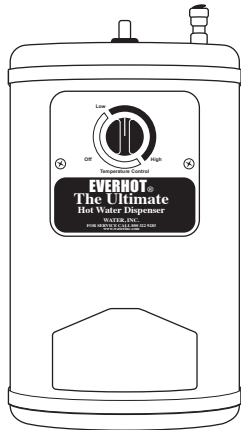

**Maximum Dimensions:** Width: 7 3/4"  
Height: 13"  
Depth: 9"

Undercounter instant hot water heating tank with adjustable temperature control delivers up to 190° hot water from a compact, stainless steel, 3 quart reservoir.

**EverHot 220/240 volt** for export has power cord attached, no plug included.

Tank pictured is available in both domestic and 220v for international.



Meets National Lead Laws including NSF 372 - 2011 Drinking Water System Components - Lead Content and S.3874, Reduction of Lead in Drinking Water Act, CA AB 1953 and VT Act 193.

The Everhot mark is used under license from Bradford White Corp.

### EVERHOT FAUCET Repair Kits

ALL REPAIR KITS

Shipping Wt: 1 lb.

CALL FOR PRICING

*For Models 610, 510, 500 Hot & Cold and Hot Only*

Part # WI-LVH-REPAIR-KIT-HOT-AND-COLD

Part # WI-LVH-REPAIR-KIT-HOT-ONLY

*For Models 610, 510, 500, 410, 400, 300 Cold Only*

Part # WI-REPAIR-KIT-COLD

*For Models 1310, 1200, 1120, 1100, 1000, 720, 700, 1310*

Use these part numbers and insert the specific model number

WI-LVH-VALVE-KIT-(Model #)-HOT-AND-COLD (if both valves are needed)

WI-LVH-VALVE-KIT-(Model #)-HOT

WI-VALVE-KIT (Model #)-COLD

#### **Repair Kits Include:**

valve(s), o-rings, set screw wrench, valve retainer removal tool & instructions

#### **Valve Kits Include:**

valve(s) & instructions

**Call the Water, Inc. service department for details of installation and ordering**

**Repairs to be performed by an authorized company only**

**800-322-9283 ext. 115 or 112**

\*These products do not fall under no-lead legislation.



**MAXIMUM recommended line pressure for this product is 75 PSI.** Pressure above 75 PSI indicates the absence of a properly functioning water pressure regulator at the property. Excessive water pressure poses a risk of property damage to you. Problems due to excessive water pressure are NOT covered by this product's warranty. **BEFORE** installation of any Water, Inc. product, **confirm that water supply pressure does not exceed 75 PSI.** Questions? Contact Water, Inc. Service Depart. at 800.322.WATER(9283)

Installations must comply with appropriate plumbing codes. **Do not use vinyl tubing to connect any Water, Inc. Product to a water source.** Polyethylene tubing is recommended for cold water applications.

ORDER DESK TEL: 800-322-WATER (9283) • EXT. 118 • FAX: 888-928-3746  
eorders@waterinc.com WI/PPD CONFIDENTIAL waterinc.com