


# EVERCOLD

## SPECIFICATIONS

### INSTANT CHILLED WATER SYSTEM • MODEL WI-WIC400S

#### Undercounter water chiller for use with sink mounted dispenser faucet.

- **Refrigeration Capacity:** Chilling capacity of 1.75 gallons (6.6 Liters) per hour of drinking water, according to standard ARI 1010 (2002).
- **Installation:** Quick and easy fast connection by 1/4" quick connect fittings.
- **Cabinet:** Powder coated galvanized steel.
- **Water Temperature Regulation:** Cold control located inside cabinet, with easy external dial.
- **Cooling Unit:** Maintenance-free 1/12 HP compressor protected by an automatically restarting motor cut-off. The refrigeration system is hermetically sealed to virtually eliminate refrigerant gas leakage.
- **Refrigerant Gas:** HFC 134a, which offers a zero ODP (Ozone Depletion Potential).
- **Waterways:** Highest quality lead free NSF approved materials (304 Stainless Steel).
- **Refrigeration Tank:** 1.2 gallons (4.4 liters).
- **Electrical Data:** 2.07 Amps, 115 Volts, 60 Hz, monophase
- **Dimensions:** 11 1/2" Height  
10 1/2" Width  
15" Depth (without plug)
- **Shipping Weight:** 36 lbs.
- Easy access drain plug.
- Supplied with 2 ft. long insulation.
- Can be used with any quality drinking water system for protection against bad tastes, lead, asbestos, rust chlorine, cysts, V.O.C.'s, THM's, and other contaminants.

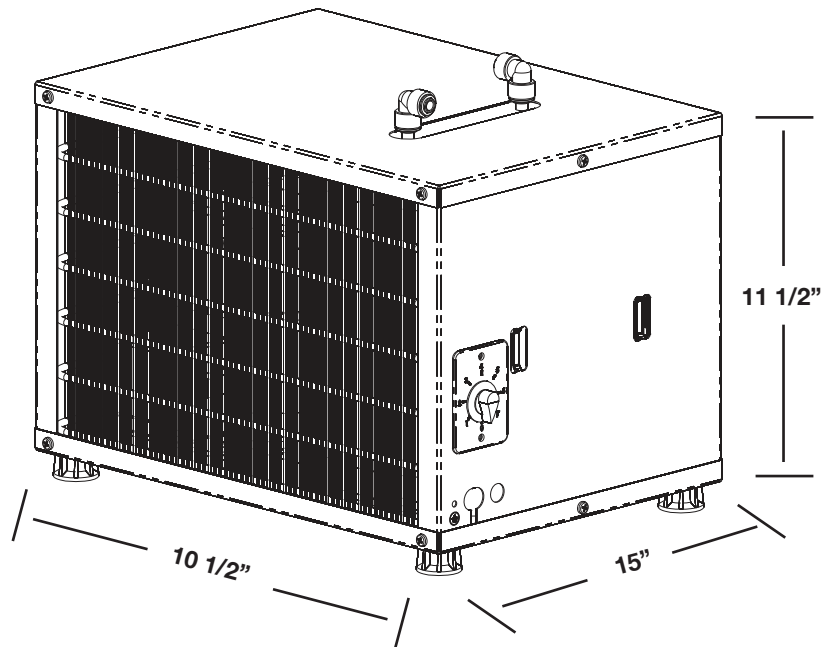

**Water, inc.**

*One Year Limited Parts & Labor Warranty. Water, Inc. warrants this product to be free from defects in workmanship or materials for a period of twelve months after purchase.*

*Water Inc. Electric Air Cooled Water Chillers have been approved and listed by ETL.*

*Your Source For Premium Quality Products That Filter, Heat, Brew, Chill, Soften, and Dispense Water*

Tel: (800) 322-9283 • Fax: (310) 885-4385  
[www.waterinc.com](http://www.waterinc.com)

# MODEL WI-WIC400S TECHNICAL DATA

COMPRESSOR TYPE		
VOLTAGE	115 V	
HERTZ	60Hz	
COOLING CAPACITY	130 Watts	
POWER CONSUMPTION	103 Watts	
CURRENT	1.20 Amps	
COMPRESSOR DISPLACEMENT	2.27 CM3	
TESTED AT ROOM TEMPERATURE	90° F	°C 32
DELIVERY PER HOUR	1.75 GAL.	LT. 6.6
WATER OUTLET TEMPERATURE	50°	°C 10
TANK CAPACITY	1.2 GAL.	LT. 4.4
FITTINGS	1/4" QUICK CONNECT	
REFRIGERANT GAS CHARGE	68 GRAMS	
REFRIGERANT GAS	R134a	
POWER SUPPLY	115/1/60 (V/n/Hz)	
COMPRESSOR TYPE	HERMETIC	
CONDENSER	AIR COOLED	
EVAPORATOR	EXTERNAL TUBE	
EXPANSION DEVICE	CALIBRATED CAPILLARY TUBE	
CONTROL	ADJUSTABLE THERMOSTAT	
DIMENSIONS: WIDTH	10 1/2"	
DEPTH	15"	
HEIGHT	11 1/2"	
NET WEIGHT	32 LBS.	
SHIPPING WEIGHT	36 LBS.	



**Water, inc.**

*Your Source For Premium Quality Products That Filter,  
Heat, Brew, Chill, Soften, and Dispense Water*

Tel: (800) 322-9283  
Fax: (310) 885-4385  
[www.waterinc.com](http://www.waterinc.com)