




MODEL	DESCRIPTION	LIST PRICE
-------	-------------	------------

**HousePure® ScaleStop
Whole House
Commercial Grade
Conditioner**

Part # WI-HPSS-2

Shipping Wt: 350 lbs.

\$9,485.95 Ea.

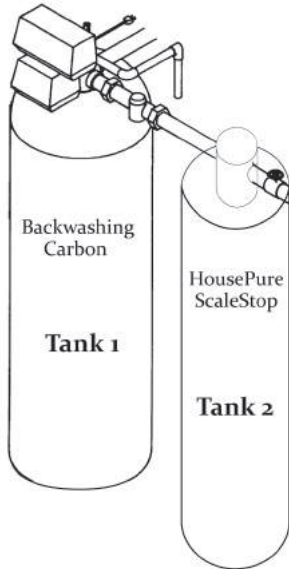

The HousePure ScaleStop 2 is the high capacity commercial version of the residential HousePure ScaleStop Conditioner. The HPSS 2 boasts 2" inlet and outlet lines for larger homes and businesses that require higher flow rates with the added scale control capacity. The pretreatment tank offers 4 cubic feet of premium coconut shell granular activated carbon along with 10 lbs of KDF-55 medium. Together, these two mediums create a high degree of pretreatment benefits including dechlorination, bacteria inhibition, and taste and odor reduction. The second tank contains 88% more ScaleStop media than residential systems, ensuring that all water is properly treated for scale control.

The HPSS-2 has a 2" inlet and outlet, which can be bushed down to accept smaller pipe sizes if needed. The unit includes a 2900 series commercial, 24VDC controller and a 3200 2" metered valve.

Includes Installation Parts and Install/Owner's Manual*

Flow Rate: 30 GPM

Dimensions (Including both tanks): Width: 32" Height: 80" Depth: 32"

Media Volume: 4-cubic feet, coconut shell granular activated carbon (Tank 1)
10-lbs, KDF-55 Medium (Tank 1)
7.5-liters, ScaleStop resin (Tank 2)

Operating Temperature Range: 34°F to 110°F (Not appropriate for freezing temperatures.)

Pipe Size: Inlet- 2", Outlet- 2", Drain- 1"

Water Pressure Range: 20 PSI to 75 PSI

Water Quality: Not for use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Operating Voltage: 24 VAC, 50/60 Hz, 120 VAC transformer included.

SCAN TO READ



HP-ScaleStop Expectations

Component Tested to NSF/ANSI Standard 42 for material requirements.



Meets no lead standards for CA AB 1953 and VT Act 193.

Customers concerned with Chloramines can upgrade this product.

Our non-chemically impregnated coconut based activated carbon has been surface modified during manufacture. **Our product is 3 times more effective than competitive products and 15 times more effective than our standard HousePure media.**

Add \$1,875.00 to the List Price for this addition.

Upgrade to more complete chloramine removal by adding at the end of the part number – **CHL**.

PLEASE NOTE:

This is not a water softener. To assist in your understanding of this product, you must read and sign the "Customer Expectation and Acknowledgment Form" before purchasing the HousePure ScaleStop products. The customer's signed form must be provided with the dealer's purchase order.



MAXIMUM recommended line pressure for this product is 75 PSI. Pressure above 75 PSI indicates the absence of a properly functioning water pressure regulator at the property. Excessive water pressure poses a risk of property damage to you. Problems due to excessive water pressure are NOT covered by this product's warranty. **BEFORE** installation of any Water, Inc. product, confirm that water supply pressure does not exceed 75 PSI. Questions? Contact Water, Inc. Service Dept. at 800.322.WATER(9283)